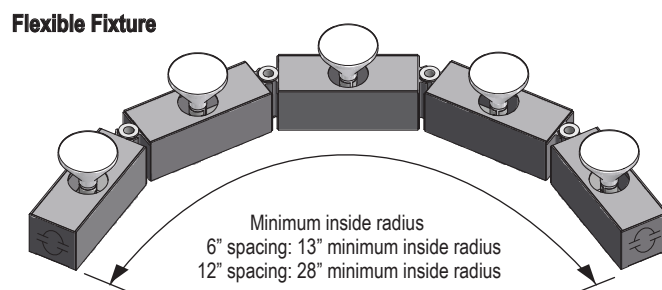
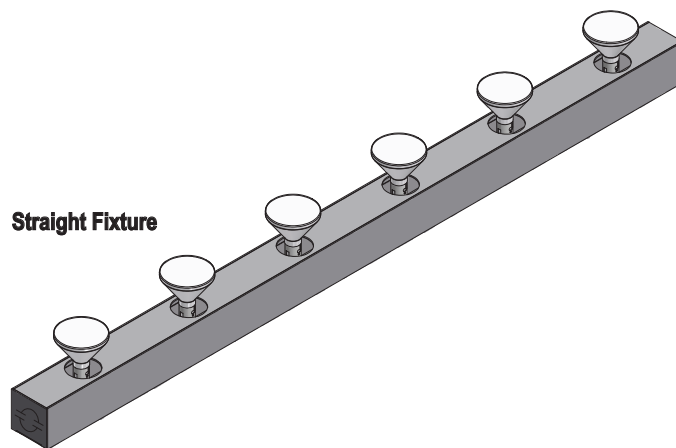
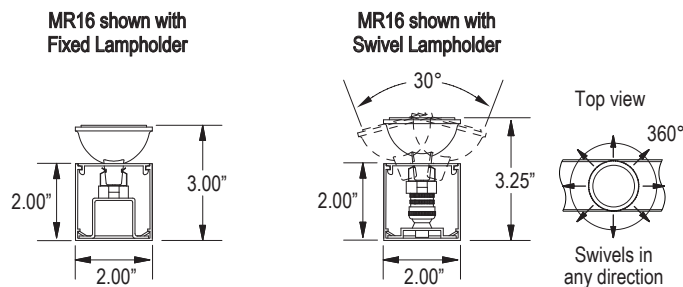


PERSEUS QH Series

- Surface-mounted striplight ideal for display, task, accent, wall-washing or wall grazing
- For use with MR16 lamps up to 50W each. Lamps not included.
- Constructed of heavy-gauge extruded aluminum housing and porcelain GU5.3-base MR16 lampholders
- Offered in straight or flexible fixtures
- Available with fixed or 360° swiveling lampholders
- Fixed lampholders allow for uniform illumination throughout application
- Swiveling lampholders allow beam of light to be aimed in precise direction
- Available in 6" or 12" lamp spacing (Consult factory for custom spacing)
- Lamp clips ensure secure lamping and prevent inadvertent dislodging
- Wiring and components are concealed inside housing for a sleek, finished look
- Available in a variety of finishes including custom powder coat
- Use with available remote 120V to 12V magnetic transformer
- Dimmable with most standard magnetic low voltage dimming systems
- Fixture lengths can be specified in 6" increments (Maximum 5 ft)
- End caps include 7/8" diameter knockouts; conduit holes may also be opened on sides or bottom of fixture using drill bit
- Fixtures are pre-wired for quick and easy installation (14 gauge wires)
- ETL Listed for Dry and Damp Location


Recommended Lamps



Only use GU5.3 base MR16 lamp rated for 12V, maximum 50W each. Consult lamp manufacturer for details. Lamps not included with fixture.

How to Specify PERSEUS QH Series

PER - QH -										
	Fixture Configuration		Lampholder		Lamp Spacing		Intended Lamp		Finish	
	ST	Straight fixture	FX	Fixed	6	6" on center	20	20W 12V MR16	SAT	Anodized satin
	FL	Flexible fixture	SW	Swivel	12	12" on center	35	30W 12V MR16	PAL	Polished aluminum
							50	50W 12V MR16	BLK	Black powder coat
							* Lamps not included		WHT	White powder coat
									CPC	Custom powder coat (consult factory)
Example										
PER - QH -	ST		SW		12		20		SAT	

Transformers
Ratings

- Input: 120VAC or 277VAC, 50/60 Hz
- Output: 12VAC
- Output current: 15 Amps per output circuit (3 outputs)
- Maximum output power: 600W
- Overload protection: Manual reset circuit breaker
- Enclosure: Indoor / outdoor enclosure with conduit knockouts
- Operating temperature: -30° to 60° Celsius
- Certification: ETL Listed for low voltage lighting


Maximum Load

- Maximum 180W per 15A output
- Feeds up to 3 x 50W lamps, 4 x 35W lamps or 8 x 20W lamps

Ordering Codes

Item Number	Watts	Volts	Outputs	Dimensions	Weight
QHTE-120-600	600 W	120VAC to 12VAC	3 x 15A	8.5" H x 5.5" W x 6.0" D	22 lbs
QHTE-277-600	600 W	277VAC to 12VAC	3 x 15A	8.5" H x 5.5" W x 6.0" D	22 lbs

How to Feed PERSEUS QH Series
600W Power Supply

Feeds up to:

- 3 x 50W lamps
- 4 x 35W lamps
- 8 x 20 W lamps

Example

