

AQUARIUS Q Series LED Marquee Light

AQUARIUS Striplight Features

- Surface-mounted striplight ideal for outdoor marquee and linear lighting
- Gamma LED lamps (medium base, 120V) included
- Constructed of heavy-gauge extruded aluminum housing and 120V medium base lampholders
- Available in 6" or 12" lamp spacing (Consult factory for custom spacing)
- Wiring and components are concealed inside housing for a sleek, finished look
- Available in a variety of finishes to protect fixture against corrosion
- Custom color-matching powder coat finish also available
- Custom curving to radius available
- Chase wiring available
- Fixture lengths can be specified to 1/8 inch
- Maximum length of single fixture section is 10ft
- Fixtures may ship in sections less than 10ft in order to minimize freight, unless specified otherwise
- Multiple fixture sections can be mounted end-to-end in continuous row
- Fixtures are pre-wired for quick and easy installation
- End caps include 7/8" diameter knockouts; conduit holes may also be opened on sides or bottom of fixture using drill bit
- ETL Listed for Wet location

GAMMA Lamp Features

Physical Construction

- Lamp size is comparable to G16.5 bulb
- E26 base fits standard medium base lampholders
- Available with clear glass, frosted glass or milky white glass

Optical Characteristics

- 1800K clear lamp emulates filament bulb
- 2700K frosted lamp emulates standard light bulb
- 2700K milky white lamp emulates standard light bulb
- Tight color-binning of LEDs ensures uniformity of color
- Emits no UV or IR


Electrical Specifications

- Consumes only 2W per lamp
- Runs on 120V
- Not recommended for dimming applications
- UL listed for Wet Location

Heat Management and Rated Life


- Built-in heat sink effectively protects LEDs
- Rated life is 25,000 hours, with 70% lumen maintenance, when used in normal environmental conditions
- Long life results in low maintenance and replacement costs
- Produces no radiant heat; optimal for heat-sensitive applications

AQUARIUS Q Striplight

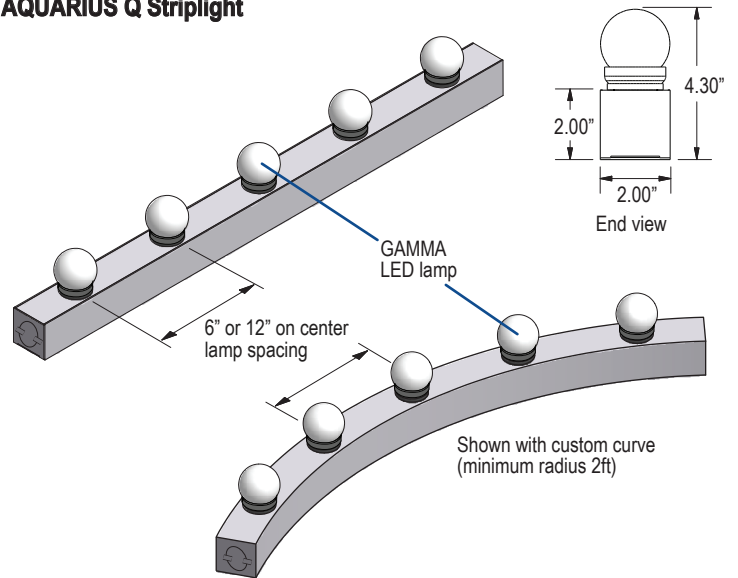

GAMMA LED Lamps



Clear Lamp

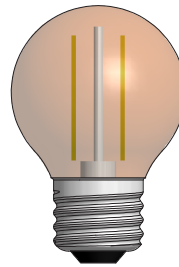

Frosted Lamp



Milky White Lamp

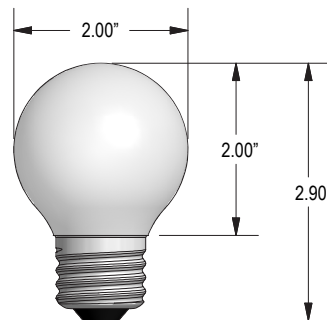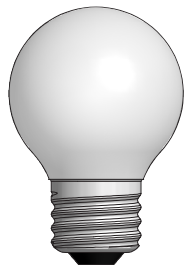

- 1800K clear lamp
- 2700K frosted lamp
- 2700K milky white lamp
- 2W per lamp
- 25,000 hours rated life
- 120V
- Retrofits into standard medium base lampholders
- Consult factory for shatter proof coating

How to Specify AQUARIUS Q Series

AQR - Q -									
	GAMMA LED Lamp		Lamp Spacing	Circuit	Finish				
	GC	1800K clear LED lamp (2W)	6	6" on center	SC	Single circuit	SAT	Anodized satin	Radius See Radius Guide for details
	GF	2700K frosted LED lamp (2W)	12	12" on center	CH	4 circuit chase	BLK	Powder coat black	
	GM	2700K milky white LED lamp (2W)	Consult factory for custom spacing				WHT	Powder coat white	
							CPC	Custom powder coat (consult factory)	
Example									Leave blank for standard straight sections
AQR - Q -	GC		12		SC	SAT			


Radius Guide for AQUARIUS Q Series

The AQUARIUS Q Series fixture can be ordered with custom curves. Complete the form below to specify exact radius information. Consult factory for assistance.

STEP 1 - FILL IN	PRODUCT CODE			Refer to "How to Specify AQUARIUS Q Series"	
STEP 2 - FILL IN	TOTAL LENGTH OF RUN	FEET:	INCHES:	Measure length of entire run with this radius	
STEP 3 - FILL IN	RADIUS	FEET:	INCHES:	Verify in field prior to ordering. Minimum radius is 2 feet.	
STEP 4 - CIRCLE ONE	MEASURE POINT (See below for details)	IR	CR	OR	IR - Inside Radius CR - Centerline Radius OR - Outside Radius
STEP 5 - CIRCLE ONE	LAMP POSITION (See below for details)	LO	LI	LC	LO - Lamp Outside LI - Lamp Inside LC - Lamp Centered

Production will not begin until receipt of above information with appropriate sign-offs. Contractor is responsible for verifying field measurements. Allow 3 weeks for curving in addition to standard lead times.

Measure Point

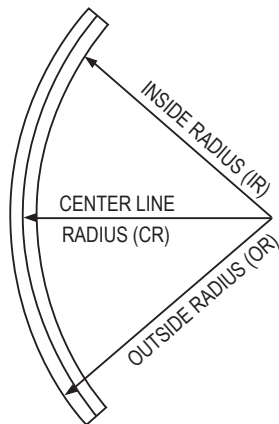

Lamp Position

