



**GEMINI Row Indicator**

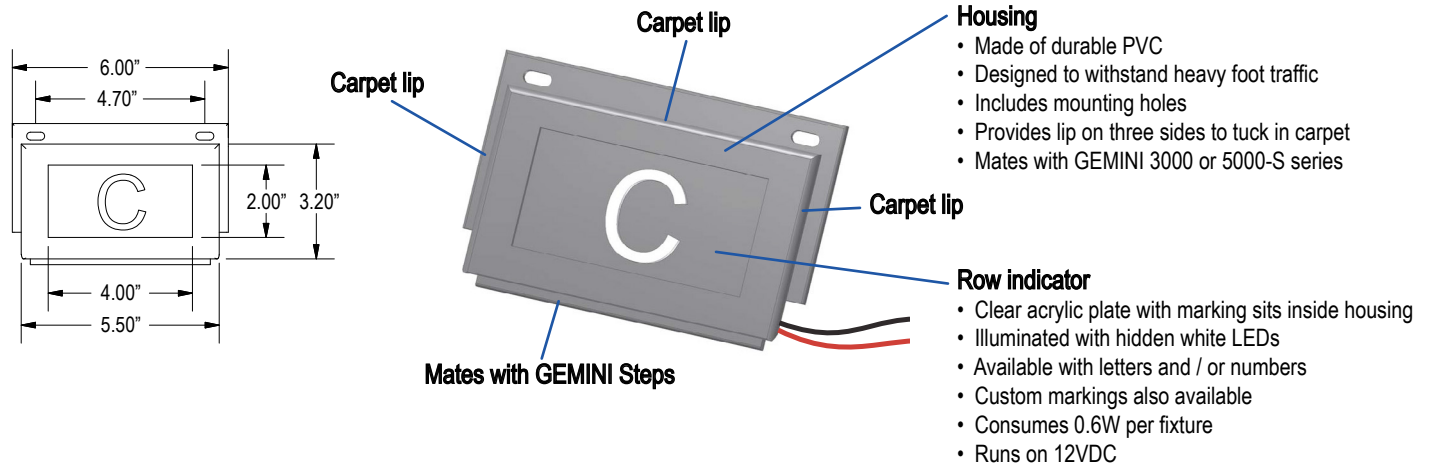


**Mounting Locations**

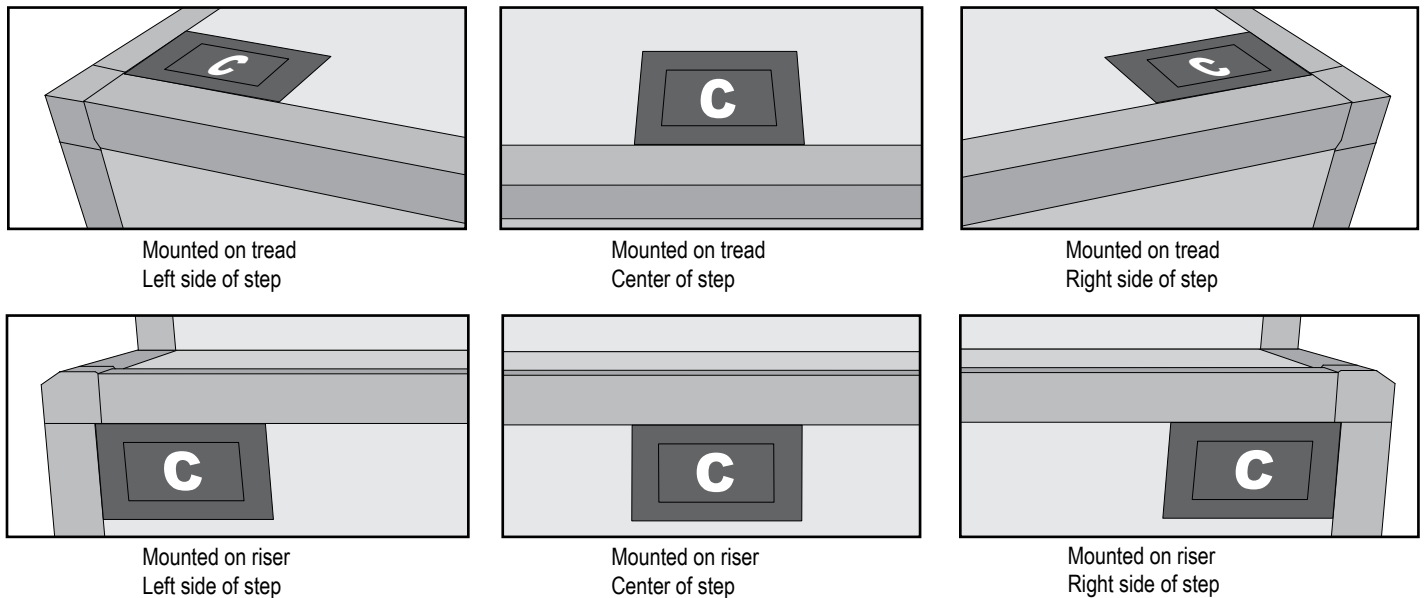

**How to Specify GEMINI 7000**

<b>GEM - 7000 -</b>	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
	<b>LED Color</b>		<b>Type</b>		<b>Marking</b>
	A Amber		RI-1 One letter or one digit		Specify letter and / or number. Consult factory for custom marking.
	B Blue		RI-2 Two letters or two digits, or combination of one letter and one digit		
	R Red		RI-3 Custom marking		
<b>Example</b>	W White				
<b>GEM - 7000 -</b>	<b>A</b>	-	<b>RI-2</b>	-	<b>A5</b>

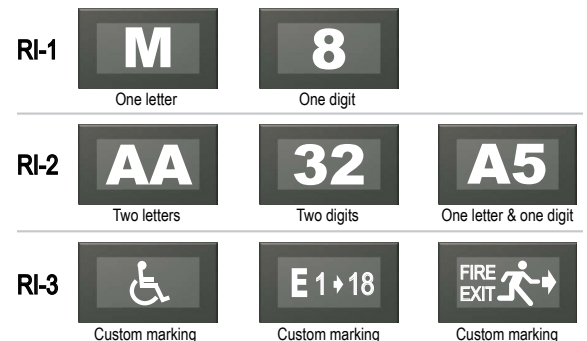

## Power Supplies

### Ratings

- Input: 120VAC or 277VAC, 50/60 Hz
- Output: 12VDC
- Output current: 5 Amps per output circuit
- Maximum output power: 60W or 240W
- Overload protection: Manual reset circuit breaker
- Enclosure: Indoor / outdoor enclosure with conduit knockouts
- Operating temperature: -30° to 60° Celsius
- Certification: UL Class 2 Power Supply

### Maximum Load


- Maximum 80 units per 5A output circuit
- Do not connect more than 80 units per 5A output

### Dimming

- Compatible with most standard magnetic low voltage dimmers
- Wire dimmer to primary side of power supply
- Requires minimum 50 units per 5A output for effective dimming
- Recommended dimmer: Lutron Nova Series NTLV-600 (120VAC, 600W, single pole)

### Ordering Codes

Item Number	Watts	Volts	Outputs	Dimensions	Weight
GPS-120-60	60 W	120VAC to 12VDC	1 X 5A	11.25" H x 3.375" W x 3.25" D	7 lbs
GPS-277-60	60 W	277VAC to 12VDC	1 X 5A	11.25" H x 3.375" W x 3.25" D	7 lbs
GPS-120-240	240 W	120VAC to 12VDC	4 X 5A	14.25" H x 8.750" W x 4.50" D	20 lbs
GPS-277-240	240 W	277VAC to 12VDC	4 X 5A	14.25" H x 8.750" W x 4.50" D	20 lbs

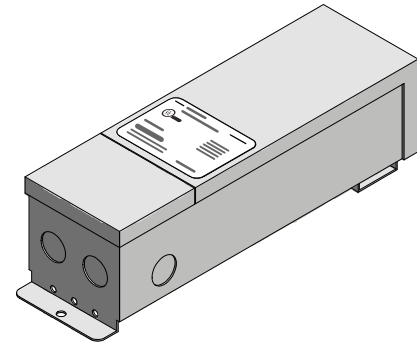

Must be mounted in an accessible location with sufficient ventilation and must not be submerged.