

**VIRGO BXOX 27 Series**

**Features**

- Flexible fluorescent striplight for long compact fluorescent lamps, with exceptional lumen-per-watt ratio, long rated life and superior color rendering
- Durable fixture construction, with ballasts and components from industry-leading sources
- Pre-wired and fully assembled for quick and easy installation
- UL Listed for Dry Location, surface mount
- Ideal for indirect lighting in curved spaces
- Lamps overlap to create shadow-free light at close distances from illuminated surface

**Lamp Information**


- For 27W/24W compact fluorescent lamp (2G11 base 4-pin twin tube)
- Up to 75 lumens per watt
- Color Rendering Index: 82
- Color temperatures include: 3000K, 3500K, 4100K
- Up to 20,000 hours average rated life
- Lamps not included. See chart for details.

**Fixture Construction**



- 3.65 inches wide, 4.50 inches high
- Made of extruded aluminum using high-grade alloy
- Standard finishes include mill finish, anodized satin and high-reflectance white powder coat
- Flexible joiners between lamp modules allow fixture to curve along radius
- Lamp spacing is 10" on center
- Available in 80" fixture (8 lamps), 40" fixture (4 lamps) and 10" fixture (1 lamp)
- Joiners allow fixtures to be linked together for continuous row
- UL listed lampholders, rated for up to 600V, lock lamps into position
- Pre-attached mounting tabs simplify installation
- Fixtures ship pre-wired and pre-assembled
- 14 gauge lead wires provided (hot, neutral and ground)

**Standard Ballast**

- Energy efficient, high power factor electronic ballast
- Flicker-free illumination
- Class A sound rating
- 120V or 277V
- 0°F minimum starting temperature, 158°F maximum case temperature
- UL Listed, Class P ballast with inherent overcurrent protection

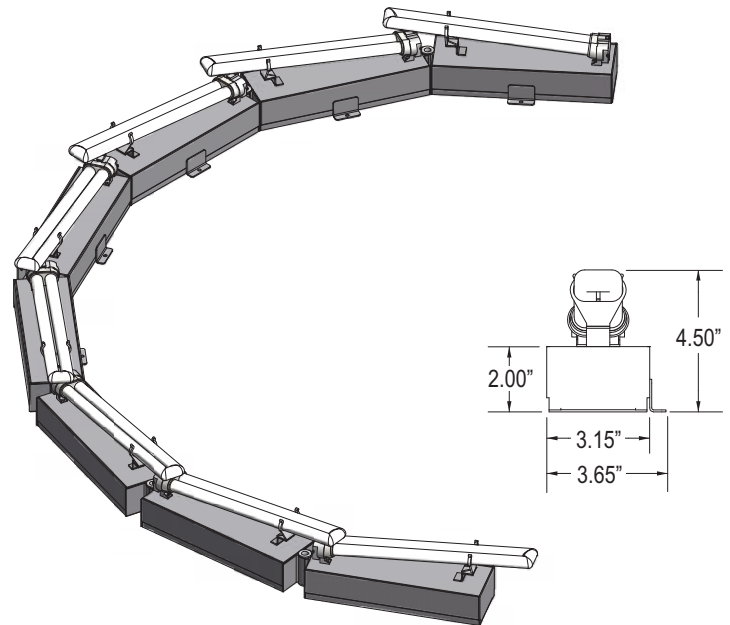

**Fixture Lengths**

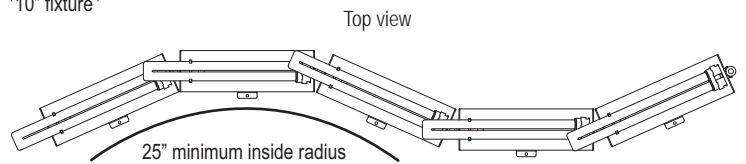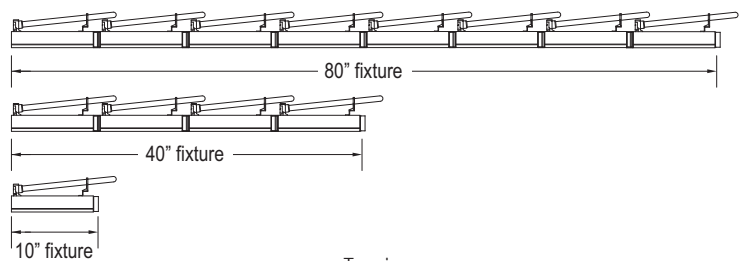

**Recommended Lamps**

Brand	Watts	Length	Base	Lumens	Lumens / Watt	Color Temp.	CRI	Rated Hrs.
GE High Lumen Biax	27W	12.8	2G11	1800	66	3000, 3500, 4100	82	12,000
Philips PL-L	24W	12.7	2G11	1800	75	3000, 3500, 4100	82	20,000
Osram Sylvania Dulux L	24W	12.9	2G11	1800	75	3000, 3500, 4100	82	12,000

Selected information based on specifications available from GE, Philips and Osram Sylvania. Consult lamp manufacturers for full selection and current details. Lamps not included with fixture.

**How to Specify VIRGO BXOX 27 Series**

VIR - BXOX - 27 -		-		-		-		
	<b>Ballast</b>		<b>Volts</b>		<b>Finish</b>		<b>Fixture Length</b>	
	ELE	Electronic non-dimming	120	120 Volts	NAL	Natural aluminum (mill finish)	80	80" long (8 lamps)
			277	277 Volts	SAT	Anodized satin	40	40" long (4 lamps)
					WHT	High reflectance white powder coat	10	10" long (1 lamp)
<b>Example</b>	<b>ELE</b>		<b>277</b>		<b>NAL</b>		<b>80</b>	