

**VIRGO CFX Series**

**Features**

- Low profile** flexible fluorescent striplight for small compact fluorescent lamps, with exceptional lumen-per-watt ratio, long rated life and superior color rendering
- Durable fixture construction, with ballasts and components from industry-leading sources
  - Pre-wired and fully assembled for quick and easy installation
  - UL Listed for Dry Location, surface mount
  - Ideal for indirect lighting in curved spaces

**Lamp Information**


- For 9W and 13W compact fluorescent lamps (4-pin twin tube)
- Up to 69 lumens per watt
- Color Rendering Index: 82
- Color temperatures: 2700K, 3500K, 4100K
- 10,000 hours average rated life
- **Lamps included.** See chart for details.

**Fixture Construction**



- 2.50 inches wide, 3.40 inches high
- Made of extruded aluminum using high-grade alloy
- Standard finishes include mill finish, anodized satin and high-reflectance white powder coat
- Flexible joiners between lamp modules allow fixture to curve along radius
- Lamp spacing is 8" on center
- Available in 64" fixture (8 lamps), 32" fixture (4 lamps) and 8" fixture (1 lamp)
- Joiners allow fixtures to be linked together for continuous row
- UL listed lampholders, rated for up to 600V, lock lamps into position
- Pre-attached mounting tabs simplify installation
- Fixtures ship pre-wired and pre-assembled
- 14 gauge lead wires provided (hot, neutral and ground)

**Standard Ballast**

- Energy efficient, high power factor electronic ballast
- Flicker-free illumination
- Class A sound rating
- 120V or 277V
- 0°F minimum starting temperature, 158°F maximum case temperature
- UL Listed, Class P ballast with inherent overcurrent protection

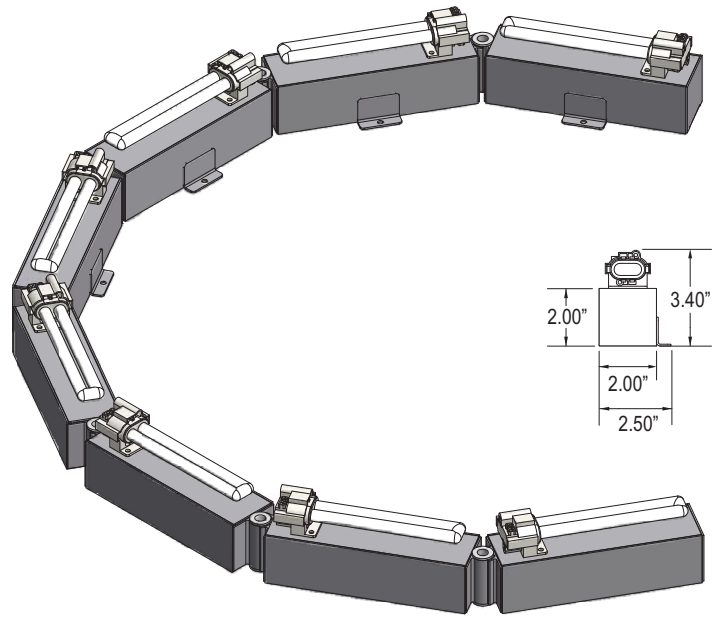

**Fixture Lengths**

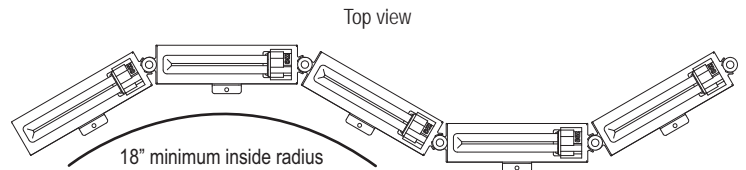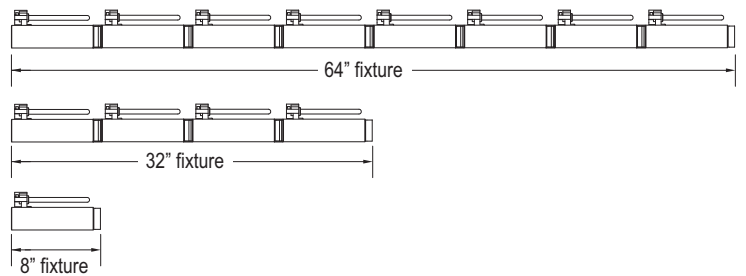

**Lamp Selection**

Brand	Watts	Length	Base	Lumens	Lumens / Watt	Color Temp.	CRI	Rated Hrs.
Fulham	9W	5.9"	2G7	600	66	2700, 3500, 4100	82	10,000
	13W	6.4"	2GX7	900	69	2700, 3500, 4100	82	10,000

Use Fulham lamps included with fixture. Do not replace with other lamps.

**How to Specify VIRGO CFX Series**

VIR - CFX -		-		-		-		-	
	<b>Lamp (included)</b>		<b>Ballast</b>		<b>Volts</b>		<b>Finish</b>		<b>Fixture Length</b>
<b>Example</b>	0927 9W compact fluorescent 2700K 0935 9W compact fluorescent 3500K 0941 9W compact fluorescent 4100K 1327 13W compact fluorescent 2700K 1335 13W compact fluorescent 3500K 1341 13W compact fluorescent 4100K		ELE Electronic non-dimming		120 120 Volts 277 277 Volts		NAL Natural aluminum (mill finish) SAT Anodized satin WHT High reflectance white powder coat		64 64" long (8 lamps) 32 32" long (4 lamps) 8 8" long (1 lamp)
VIR - CFX -	<b>0927</b>	-	<b>ELE</b>	-	<b>277</b>	-	<b>NAL</b>	-	<b>64</b>